



CORROSION-RESISTANT PLATINUM RESISTORS

CODE 0773-□□□□

CUSTOMIZABLE


- Corrosion-resistant, wear-resistant, waterproof and oil-proof, suitable for acid and alkali corrosive environments

transparent PTFE sheath
stainless steel probe
molten bottom-sealing



0773-T1M2W2L3

Code explanation:



Code example:

0773-T1M2W2L3	T1-type: PT100
	M2-lead wire method: four-wire system
	W2-wiring method: pin
	L3-lead length: 2m

SPECIFICATION

Temperature range	-50℃~200℃
Temperature accuracy	±(0.15+0.002· t)℃
Lead material	PTFE
Probe material	304 stainless steel
Probe dimension	Ø3×30mm
Outer diameter (transparent PTFE sheath)	4mm


TYPE

T1	PT100
T2	PT1000


LEAD WIRE METHOD

M1	three-wire system
M2	four-wire system

lead wire method: M1

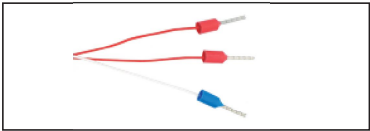

lead wire method: M2

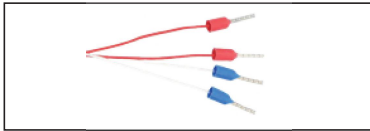

WIRING METHOD


W1	aviation connector*
W2	pin
W3	terminal
W4	bare wire

*Aviation connector can be customized

wiring method: W1




wiring method: W2

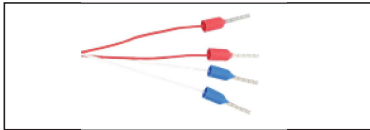

LEAD LENGTH

L1	0.5m
L2	1m
L3	2m
L4	3m
L5	5m

wiring method: W3

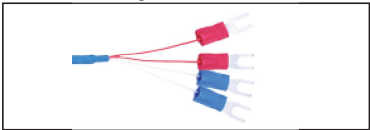

wiring method: W4

