


DIGITAL GROOVE DIAMETER MEASURING INSTRUMENTS

POINT DIAMETER
CAN BE CUSTOMIZED


DATA
OUTPUT



application



2261-5

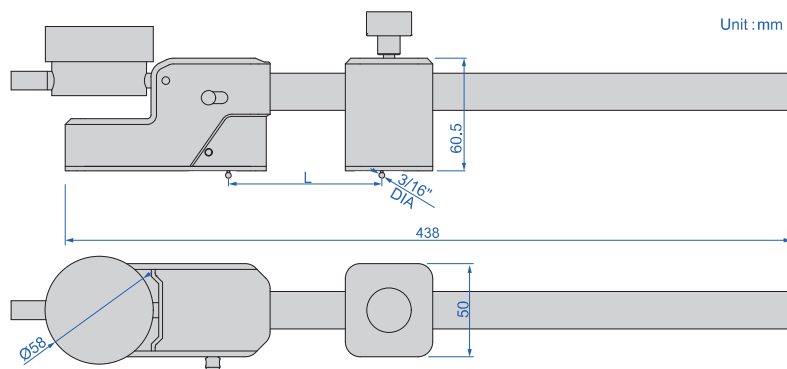

- Measure groove diameter of flange ring groove
- Point height is adjustable
- Reading in digital and analog
- Digital indicator display can be rotated by 320°
- Digital indicator button function: on/off, zero setting, tolerance Go and No-Go display, measuring direction change, max./min./TIR measurement, data preset, inch/metric conversion, data output, absolute/incremental measurement
- Digital indicator can keep preset data and tolerance data in memory after restart
- Automatic power off(time is adjustable)
- Digital indicator power:
 - with data interface: CR2032
 - built-in wireless: rechargeable Li-battery
- Data output
- Optional accessory: groove standard block(code **6254**)

With data interface (data output cable code 7315-51 need receiver, optional)

Code	Range (L)	Movable point stroke	Accuracy	Repeatability	Indicator
2261-5	2-13"/50-330mm	0.2"/5mm	5μm	2μm	Digital indicator, code 2138-10F , range 12.7mm/0.5", resolution 0.001mm/0.00005"

Built-in wireless (receiver code 7315-2/3/6/7/8/9 is required,optional)

Code	Range (L)	Movable point stroke	Accuracy	Repeatability	Indicator
2261-5WL	2-13"/50-330mm	0.2"/5mm	5μm	2μm	Digital indicator, code 2508-10FWL , range 12.7mm/0.5", resolution 0.001mm/0.00005"