
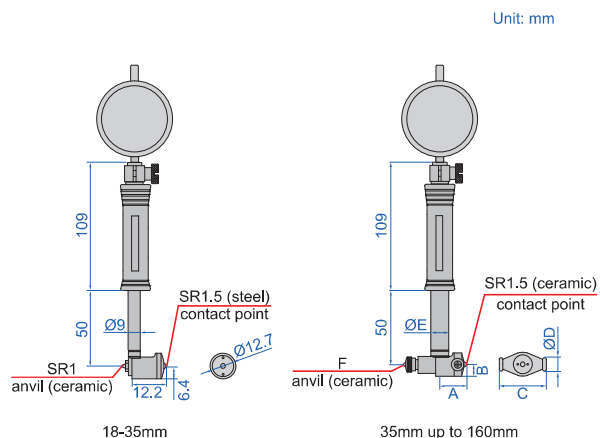


ATTENTION: NOT SUITABLE
FOR 0.001MM DIAL INDICATORS

BUILT-IN WIRELESS DIGITAL
INDICATOR IS OPTIONAL

SHORT HANDLE BORE GAUGES (WITH DIAL INDICATOR)

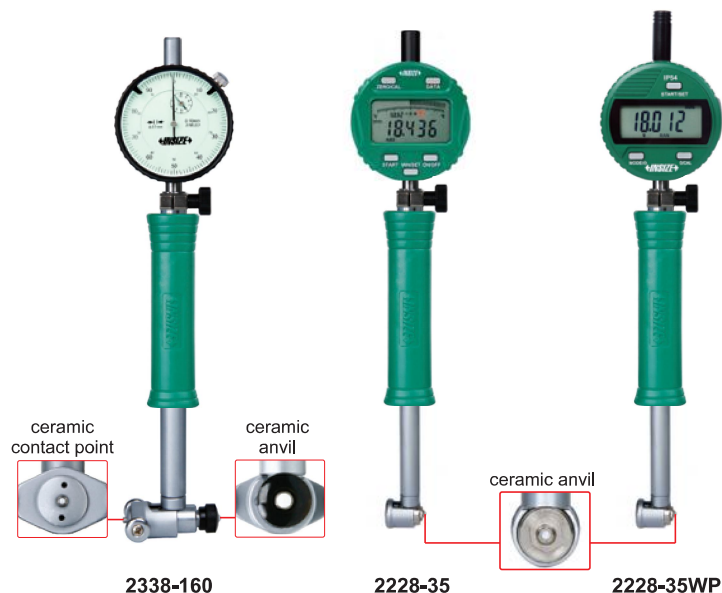


- The handle is shorter and lighter than that code 2322/2122, it is more convenient to operate in confined spaces or on workbenches
- Optional accessory: setting ring (code **6312**), bore gauge setter

(mm)						
Range	A	B	C	ØD	ØE	F
35-60mm	22	9	27	13	12.8	SR2
50-100mm	26	9	35	13	12.8	SR2
50-160mm	26	9	35	13	12.8	SR2
100-160mm	26	9	35	13	12.8	SR2

With dial indicator


Code	Range	Indicator	Accuracy	Repeatability
2338-35	18-35mm	dial indicator, code 2308-10FA , range 10mm, graduation 0.01mm	±0.015mm	0.003mm
2338-60	35-60mm		±0.018mm	0.003mm
2338-100	50-100mm		±0.018mm	0.003mm
2338-160	50-160mm		±0.018mm	0.003mm
2338-161	100-160mm		±0.018mm	0.003mm



With digital indicator (optional wireless transmitter code 7315-51B, receiver is needed)

Code	Range	Indicator	Accuracy	Repeatability
2228-35	18-35mm	digital indicator, code 2108-10F , range 12.7mm/0.5", resolution 0.002mm/0.0001" (can switch to 0.01mm/0.0005")	±0.015mm	0.003mm
2228-60	35-60mm		±0.018mm	0.003mm
2228-100	50-100mm		±0.018mm	0.003mm
2228-160	50-160mm		±0.018mm	0.003mm
2228-161	100-160mm		±0.018mm	0.003mm

with digital indicator

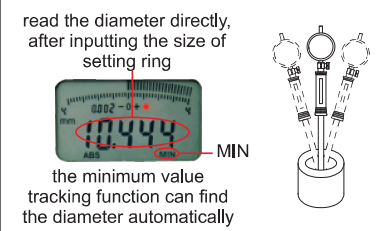

With waterproof digital indicator (optional wireless transmitter code 7315-51B, receiver is needed)

Code	Range	Indicator	Accuracy	Repeatability
2228-35WP	18-35mm	waterproof digital indicator, code 2137-10F , range 12.7mm/0.5", dust/waterproof IP54, resolution 0.002mm/0.0001" (can switch to 0.01mm/0.0005")	±0.015mm	0.003mm
2228-60WP	35-60mm		±0.018mm	0.003mm
2228-100WP	50-100mm		±0.018mm	0.003mm
2228-160WP	50-160mm		±0.018mm	0.003mm
2228-161WP	100-160mm		±0.018mm	0.003mm

with waterproof digital indicator

read the diameter directly,
after inputting the size of
setting ring



the minimum value
tracking function can find
the diameter automatically

