



ATTENTION: NOT SUITABLE
FOR 0.001MM DIAL INDICATORS

BUILT-IN WIRELESS DIGITAL
INDICATOR IS OPTIONAL

BORE GAUGES FOR BLIND HOLES

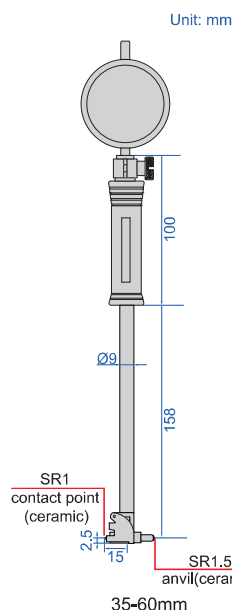

2420-60



2220-60



2220-60WP



- To measure diameter of shallow and blind holes
- Optional accessory: setting ring (code **6312**), long handle (code **7351**), bore gauge setter

With dial indicator

Code	Range	Indicator	Accuracy	Repeatability
2420-60	35-60mm	dial indicator, range 10mm, graduation 0.01mm (code 2308-10FA)	±0.018mm	0.003mm

With digital indicator

(optional wireless transmitter code 7315-51B, receiver is needed page 9)

Code	Range	Indicator	Accuracy	Repeatability
2220-60	35-60mm	digital indicator, code 2108-10F , range 12.7mm/0.5", resolution 0.002mm/0.0001" (can switch to 0.01mm/0.0005")	±0.018mm	0.003mm


With waterproof digital indicator

(optional wireless transmitter code 7315-51B, receiver is needed page 9)


Code	Range	Indicator	Accuracy	Repeatability
2220-60WP	35-60mm	waterproof digital indicator, code 2137-10F , range 12.7mm/0.5", dust/waterproof IP54, resolution 0.002mm/0.0001" (can switch to 0.01mm/0.0005")	±0.018mm	0.003mm

with digital indicator

read the diameter directly, after inputting the size of setting ring



the minimum value tracking function can find the diameter automatically



with waterproof digital indicator

read the diameter directly, after inputting the size of setting ring



the minimum value tracking function can find the diameter automatically

