



BOLT STRAIGHTNESS GAUGES


DATA
OUTPUT

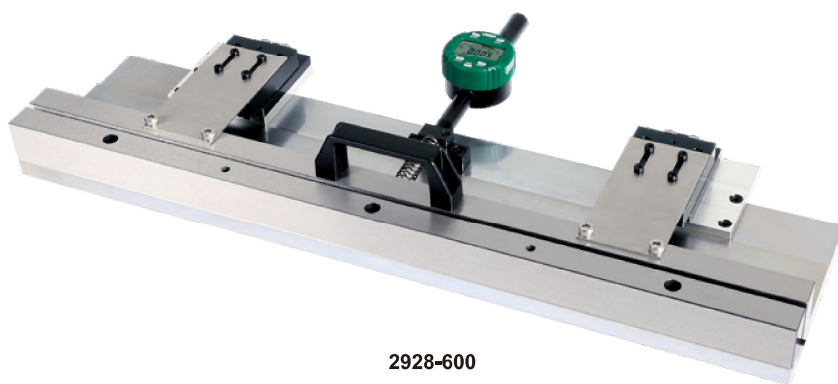

2928-600

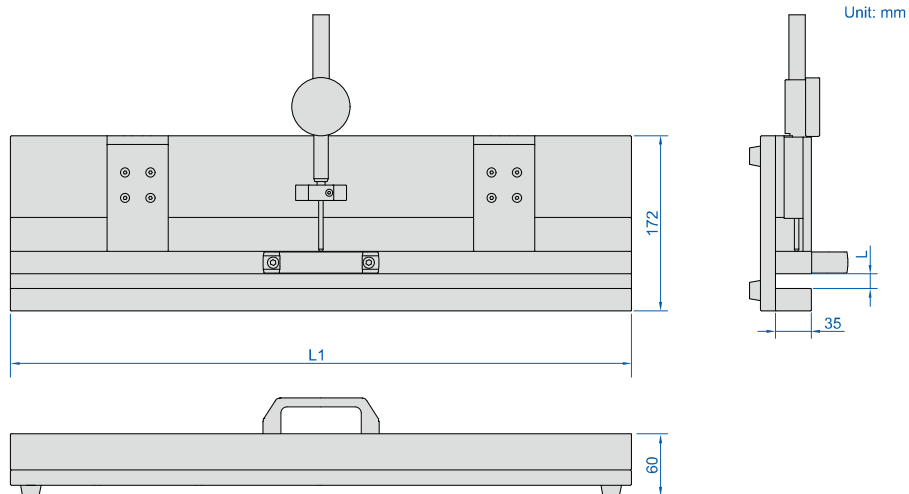

application

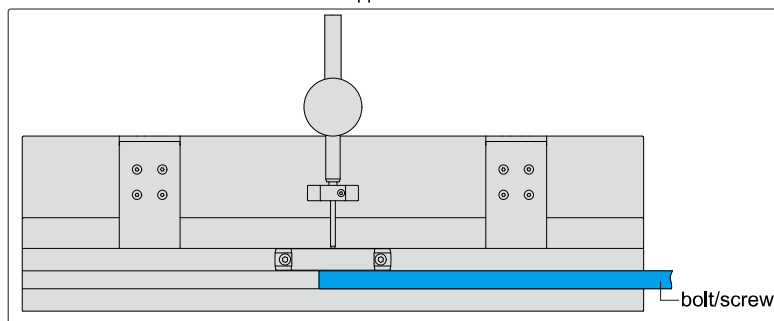

- Measure the amount of bow or camber in a bolt or screw
- Resolution: 0.001mm/0.00005"
- Reading in digital and analog
- Display can be rotate by 320°
- Button function: on/off, zero, tolerance Go and No-Go display, data preset, measuring direction change, max./min./TIR measurement, inch/metric conversion, data output, absolute/incremental measurement
- Keep preset data and tolerance data in memory after restart
- CR2032 battery, automatic power off (time is adjustable)
- Data output
- Optional accessory: wireless transmitter code **7315-51** (receiver is needed)

Code	Range (L)	Accuracy	Repeatability	L1
2928-300	0-40mm/0-1.6"	0.03mm	0.01mm	305mm
2928-600	0-40mm/0-1.6"	0.06mm	0.02mm	610mm