



# SNAP-OPEN DIGITAL THREE POINTS BORE GAUGES

**IP54**  
WATERPROOF


**BUILT-IN**  
BLUETOOTH



**type A**  
6-12mm, steel  
measuring points




**type B**  
12-50mm, carbide  
measuring points



**type C**  
50-300mm, carbide  
measuring points




**3129-63**

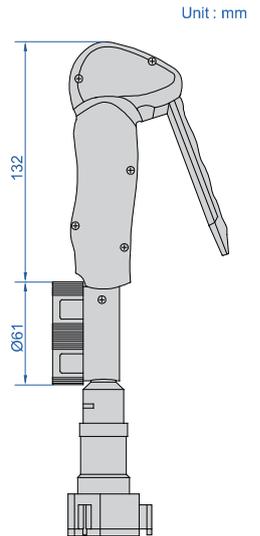

Unit : mm

- Adjustable resolution: 0.0005mm/0.00002"  
0.001mm/0.00005"
- Display can be rotated by 270°
- Button function: on/off, zero setting, data preset, tolerance, data hold, mm/inch, measuring direction change, blue tooth, max./min./TIR, adjust resolution, absolute/incremental measurement, data output
- Android and iPhone APP, USB type-C cable are included
- Easy and quick measurement
- Power: rechargeable Li-battery, for 30 hours continuous working (bluetooth transmission reduce working hours)
- Optional accessory: setting rings (code **6312**)



(mm)

Code	Range	Type	Accuracy	Setting ring	Extension rod (included)	a	b	c
<b>3129-8 *</b>	6-8mm/0.24-0.31"	A	4µm	Ø6mm (included)	100mm	1.5	2.5	—
<b>3129-10 *</b>	8-10mm/0.31-0.39"	A	4µm	Ø8mm (included)	100mm	1.5	2.5	—
<b>3129-12 *</b>	10-12mm/0.39-0.47"	A	4µm	Ø10mm (included)	100mm	1.5	2.5	—
<b>3129-16 *</b>	12-16mm/0.47-0.63"	B	4µm	Ø16mm (included)	150mm	0.5	6	4.5
<b>3129-20 *</b>	16-20mm/0.63-0.79"	B	4µm	Ø16mm (included)	150mm	0.5	6	4.5
<b>3129-25 *</b>	20-25mm/0.79-0.98"	B	4µm	Ø25mm (included)	150mm	0.5	8	6
<b>3129-30 *</b>	25-30mm/0.98-1.18"	B	4µm	Ø25mm (included)	150mm	0.5	8	6
<b>3129-40 *</b>	30-40mm/1.18-1.57"	B	4µm	Ø40mm (included)	150mm	0.5	14	12
<b>3129-50 *</b>	40-50mm/1.57-1.97"	B	5µm	Ø40mm (included)	150mm	0.5	14	12
<b>3129-63 *</b>	50-63mm/1.97-2.48"	C	5µm	Ø62mm (included)	150mm	0.5	17.5	14.5
<b>3129-75 *</b>	62-75mm/2.44-2.95"	C	5µm	Ø62mm (included)	150mm	0.5	17.5	14.5
<b>3129-88 *</b>	75-88mm/2.95-3.46"	C	5µm	Ø87mm (included)	150mm	0.5	17.5	14.5
<b>3129-100 *</b>	87-100mm/3.43-3.94"	C	5µm	Ø87mm (included)	150mm	0.5	17.5	14.5
<b>3129-125 *</b>	100-125mm/3.94-4.92"	C	6µm	<b>optional</b>	150mm	0.9	29	25
<b>3129-150 *</b>	125-150mm/4.92-5.91"	C	6µm	<b>optional</b>	150mm	0.9	29	25
<b>3129-175 *</b>	150-175mm/5.91-6.89"	C	7µm	<b>optional</b>	150mm	0.9	29	25
<b>3129-200 *</b>	175-200mm/6.89-7.87"	C	7µm	<b>optional</b>	150mm	0.9	29	25
<b>3129-225</b>	200-225mm/7.87-8.86"	C	8µm	<b>optional</b>	150mm	0.9	29	25
<b>3129-250</b>	225-250mm/8.86-9.84"	C	8µm	<b>optional</b>	150mm	0.9	29	25
<b>3129-275</b>	250-275mm/9.84-10.83"	C	9µm	<b>optional</b>	150mm	0.9	29	25
<b>3129-300</b>	275-300mm/10.83-11.81"	C	9µm	<b>optional</b>	150mm	0.9	29	25