




QUICK-POSITIONING, SUITABLE
FOR MASS MEASUREMENT

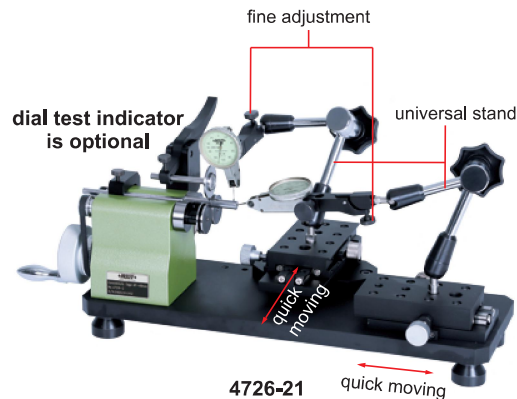


VIDEO

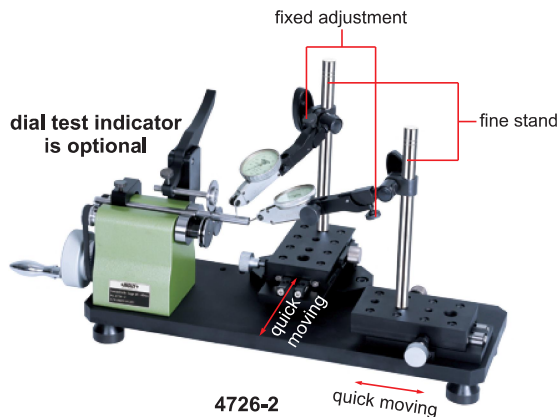

to ensure the accuracy $2\mu\text{m}$,
the distance between measuring
point and roller should be $<30\text{mm}$



- With ball bearing, high stability, long working life
- Accuracy: $2\mu\text{m}$
- Optional accessory: dial test indicator

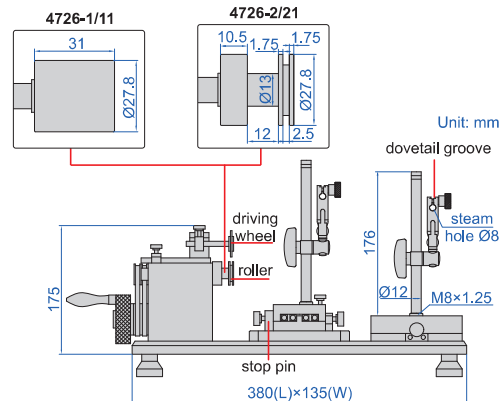

Code	Applicable diameter	Remark
4726-1	$\varnothing 4\text{--}40\text{mm}$	fixed stand, good rigidity
4726-2	$\varnothing 2\text{--}40\text{mm}$	fixed stand, good rigidity
4726-11	$\varnothing 4\text{--}40\text{mm}$	universal stand, convenient operation
4726-21	$\varnothing 2\text{--}40\text{mm}$	universal stand, convenient operation