



COMBINED CONCENTRICITY GAUGE

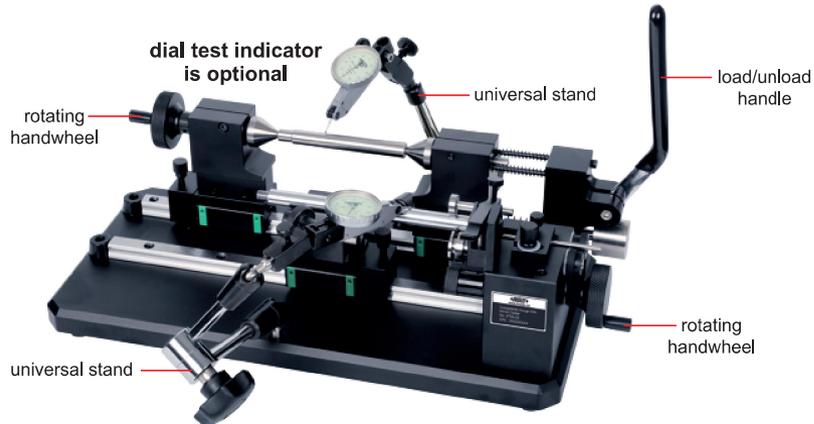

4756-25

- Roller and center positioning modes can be quickly switched for workpieces with/without centering holes
- Roller suitable for cylinders with outside diameter $\varnothing 3\text{-}25\text{mm}$
- Center suitable for cylinders with outside diameter $\varnothing 3\text{-}120\text{mm}$ (centering hole diameter $\varnothing 1\text{-}25\text{mm}$)
- Optional accessory: dial test indicator

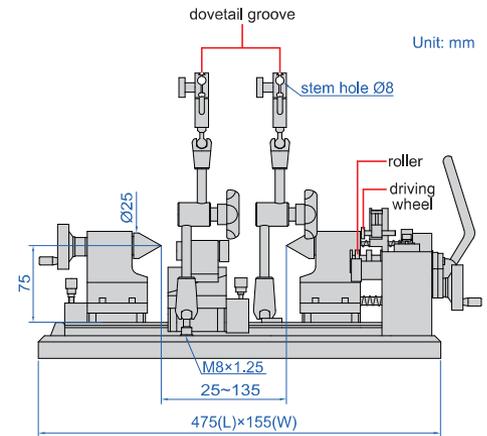

4756-25

Code	Runout accuracy	Workpiece length	Net weight	Load (center)	Remarks
4756-25	2 μm	15-152mm(roller) 25-135mm(center)	14kg	6kg	universal stand, convenient operation