

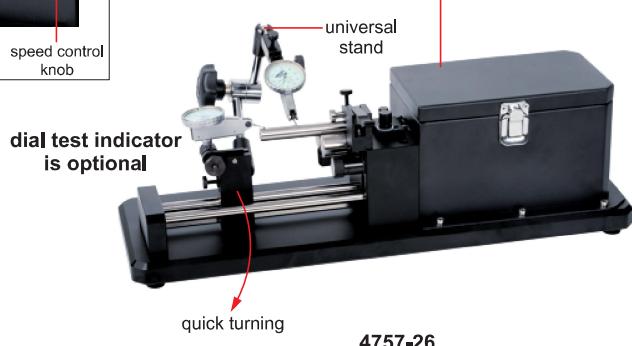



MOTORIZED CONCENTRICITY GAUGES

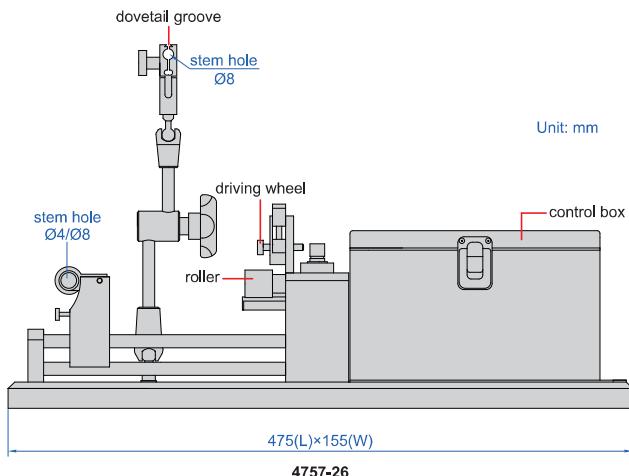

- Motorized measurement is suitable for mass production inspection
- Power supply: 100~220V, 50/60Hz
- Optional accessory: dial test indicators

to ensure the accuracy 2 μ m,
the distance between measuring
point and roller should be <30mm

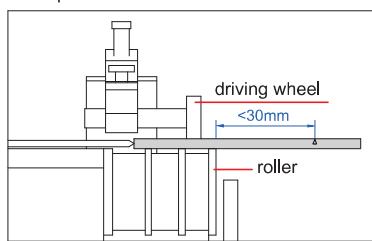

Code	Diameter range	Workpiece length	Accuracy	Net weight	Remark
4757-25	Ø3~25mm	15~152mm	2 μ m	7.6kg	fixed stand, high rigidity
4757-26	Ø3~25mm	15~152mm	2 μ m	7.6kg	universal stand, convenient operation