




CONCENTRICITY GAUGES

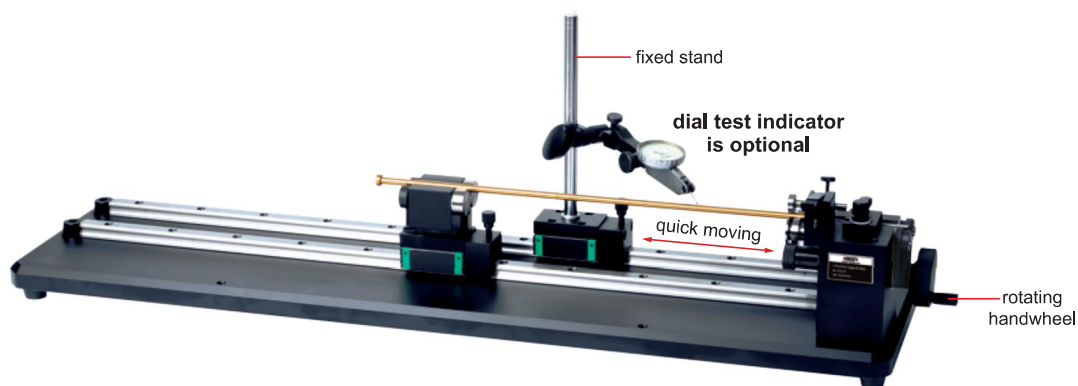

4768-35

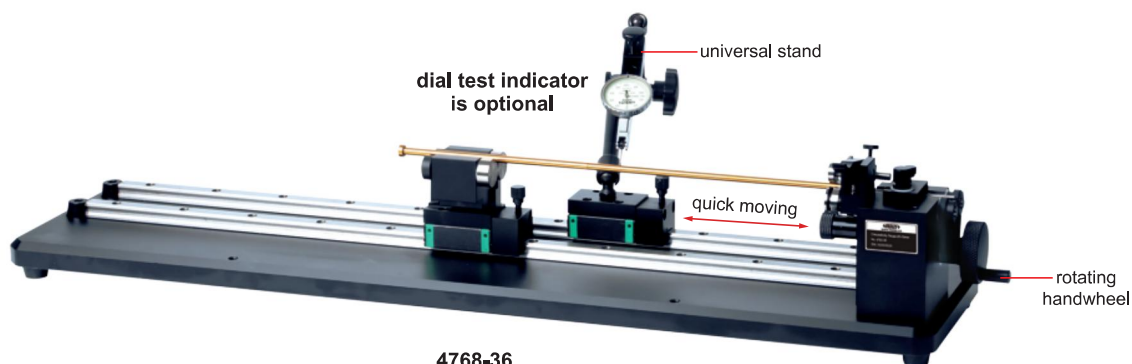

4768-36

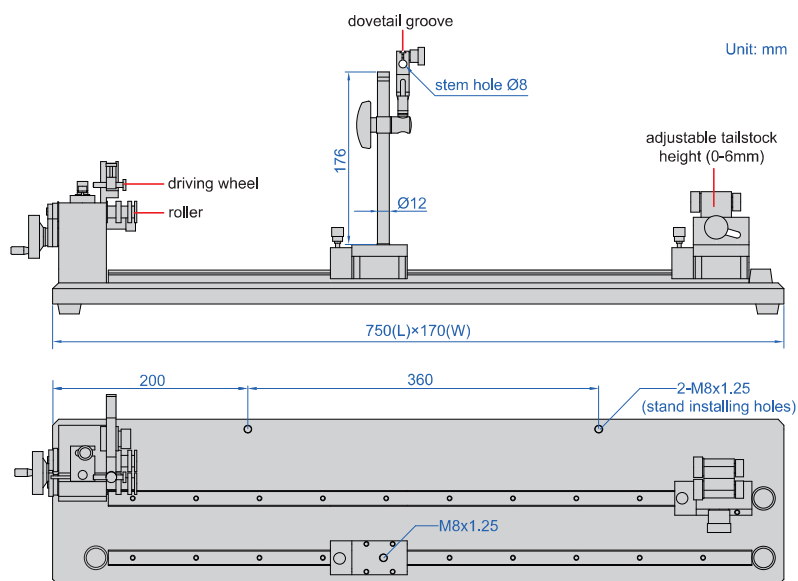

4768-35

- Quick positioning, suitable for mass measurement
- Fixed/universal stands can be optionally installed on request, up to 3
- Adjustable height tailstock: 0-6mm, suitable for stepped cylindrical workpieces
- Optional accessory: dial test indicators (code **2880-02**, **2880-02R**, **2897-02**, **2380-02**, **2381-02**, **2381-021**), fixed stand, universal stand

Code	Diameter range	Workpiece length	Accuracy	Net weight	Remark
4768-35	Ø3-35mm	15-610mm	2µm	10.5kg	fixed stand, high rigidity
4768-36	Ø3-35mm	15-610mm	2µm	10.5kg	universal stand, convenient operation