

CAPACITANCE LINEAR GAUGES (ABSOLUTE TYPE)

IP67
WATERPROOF



7181-42



7181-42V

pop up with air,
retract without air

- Absolute encoder, the original data remains after power off
- Shock-proof, water proof, dust proof, suitable for high speed movement, long working life
- Can be connected to display unit, or directly connected to computer or PLC

CAPACITANCE LINEAR GAUGE SPECIFICATION


Code	7181-41	7181-42	7181-41V	7181-42V
Measuring range	10mm			
Resolution	0.01mm	0.001mm	0.01mm	0.001mm
Accuracy	20μm	3μm	20μm	3μm
Hysteresis	10μm	2μm	10μm	2μm
Driving type	spring		pneumatic	
Measuring force	1.2N		adjusted by air pressure	
Measuring principle	capacitance type linear encoder			
Voltage	5~24V			
Sampling frequency	100 times/sec			
Working life	ten million times			
Dust/waterproof	IP67			
Cable length	2m (can be customized)			
Data output	RS485			
Dimension (L×W×H)	143×32×15mm			
Weight	160g			

OPTIONAL ACCESSORY


Singlechannel display unit	7181-4A
Multichannel display unit	7181-4B
Connection box	7181-4C *
Series port	7181-PORT **
Port cable	7181-P-CABLE ***

- * work with optional **7181-4B**, one multichannel display unit can be connected with up to 14 connection boxes
- ** 4 ports, total length 70mm
- *** cable length: 20mm, customized according to customer requirements



unit: mm

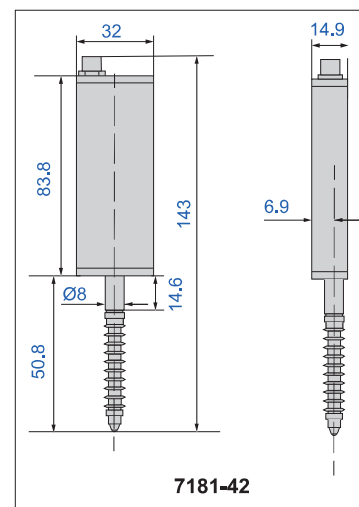

7181-42

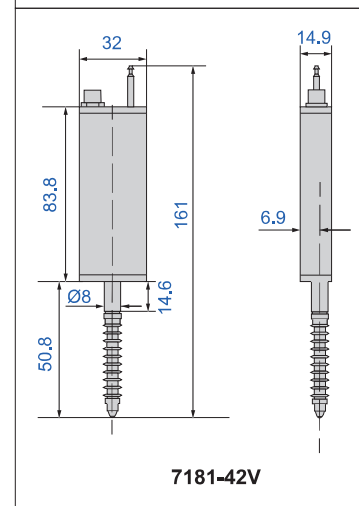

7181-42V

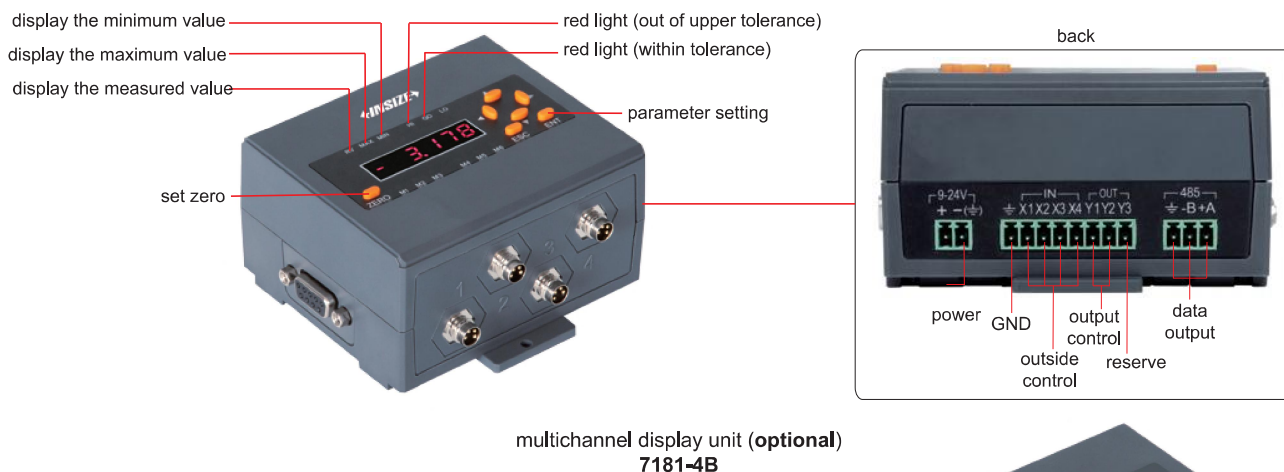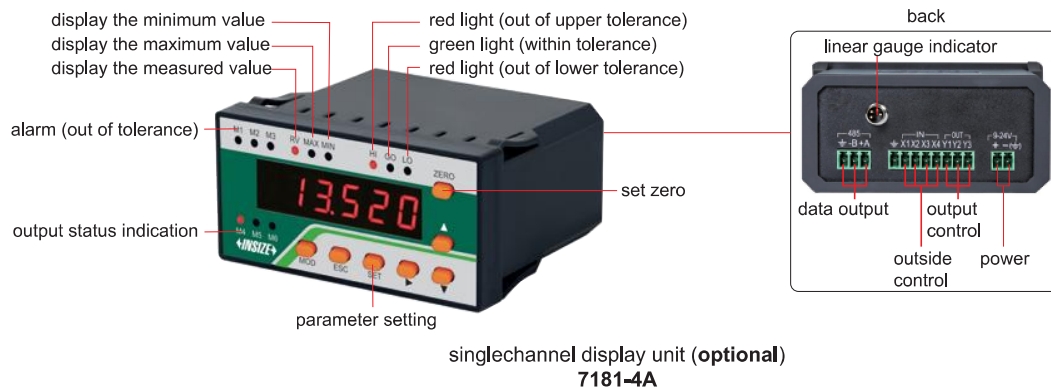

DISPLAY UNITS SPECIFICATION (OPTIONAL)

Code	7181-4A	7181-4A
Quantity of linear gauge to be connected	1 pc	4 pcs (expandable to 60 linear gauges, by connecting to connection box 7181-4C)
Display	6 digits	
Tolerance	set tolerance and make judgment with alarm and lights (out of upper tolerance, within tolerance, out of lower tolerance)	
Output control	output the tolerance judgment (out of upper tolerance, within tolerance, out of lower tolerance) to control outside devices	
Outside control	control the display units from outside (set zero, hold reading and collect data)	
Data output	connect to computer software and serial communication	
Power supply	DC 9~24V	




standard display unit computer software, adaptable to 7181-4A (optional) or 7181-4B (optional)


CONNECTION BOX SPECIFICATION (OPTIONAL)

Code	7181-4C *
Quantity of linear gauge to be connected	4 pcs

* work with optional 7181-4B, one multichannel display unit can be connected with up to 14 connection boxes

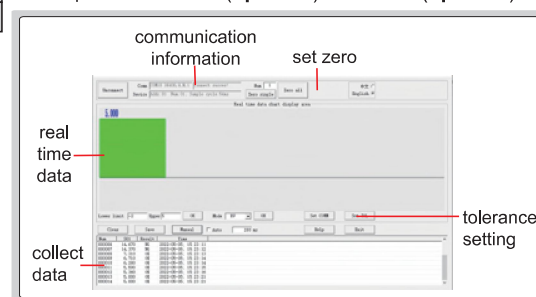

unit: mm

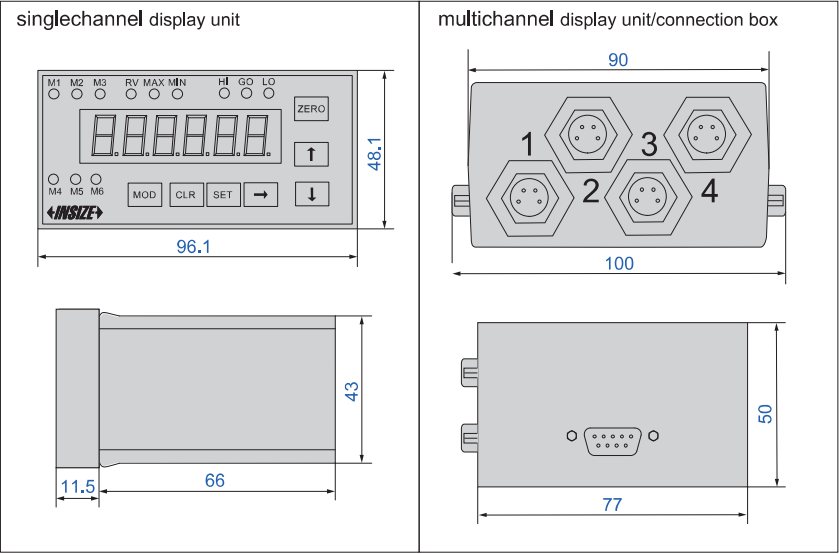

application

