


## PORTABLE TEMPERATURE DRY BLOCK CALIBRATORS (MEDIUM TEMPERATURE TYPE)

- Used for temperature calibration in industrial or laboratory
- Unit: °C, °F
- Language: English, Chinese
- Overheat protection
- Multi-point temperature correction function
- Automatic tuning of temperature control parameters
- Segmented PID control, one-button heating, full-automatic temperature control

soaking block (included), can be customized

soaking block

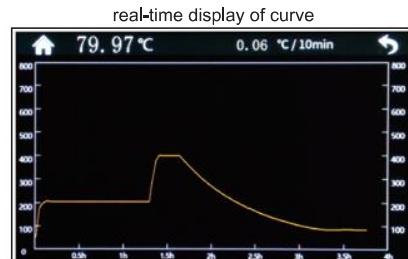

### SPECIFICATION

Code	DBC-M660A	DBC-M660B
Temperature range	50°C~660°C	
Temperature resolution	0.01°C	
Temperature fluctuation	±0.2°C	±0.1°C
Radial uniformity	≤0.3°C	≤0.15°C
Soaking block	insertion aperture: Ø4.5mm, Ø6.5mm, Ø8mm, Ø10mm can be customized	
Depth	well depth: 170mm, hole depth: 155mm	
Control method	touch screen	
Power	650W	
Power supply	220V/50Hz	
Dimension (L×W×H)	285×170×335mm	
Net weight	9.4kg	

### STANDARD DELIVERY

Main unit	1pc
Soaking block	1pc