

## BUILD-IN WIRELESS DIGITAL TORQUE SCREWDRIVERS

BUILD-IN  
WIRELESSDATA  
OUTPUTINSPECTION  
CERTIFICATE


IST-4SD200

hex screwdriver bit  
(included)phillips screwdriver bit  
(included)**Torque screwdriver:**

- Clockwise and counter-clockwise operation
- Unit: cN.m, in.lb, kg.cm
- Peak and track working mode
- Upper and lower tolerance limits can be set and measurement results automatically calculate % difference from target value
- 10 preset target torque values and usage modes, parameters can be locked to prevent change
- With audible and visible alarm:
  - Green LED light on and buzzer sounds intermittent when target torque value is 90%~100% of target torque
  - Red and green LED lights on and buzzer sounds long-lasting when target torque value is reached
- Memory of 2000 results for browsing on the screwdriver
- Counting function, over 20% of the range counts once
- Auto power off time can be set
- Non-slip grip handle
- With overload record (once the torque reaches 110% of the maximum range)

**Data transmission:**

- Measurement results can be sent manually by pressing the M button or sent automatically after measurement
- Built-in wireless data transmission module, which can be connected with computers, mobile phones, tablets and other devices
- Data can be transmitted to Excel, Word, Txt, etc. via wireless connection
- Transmission distance is 10m (under the condition of no obstruction and no electromagnetic interference)
- Optional accessory: receiver (code 7315-2/3/6/7/8/9)

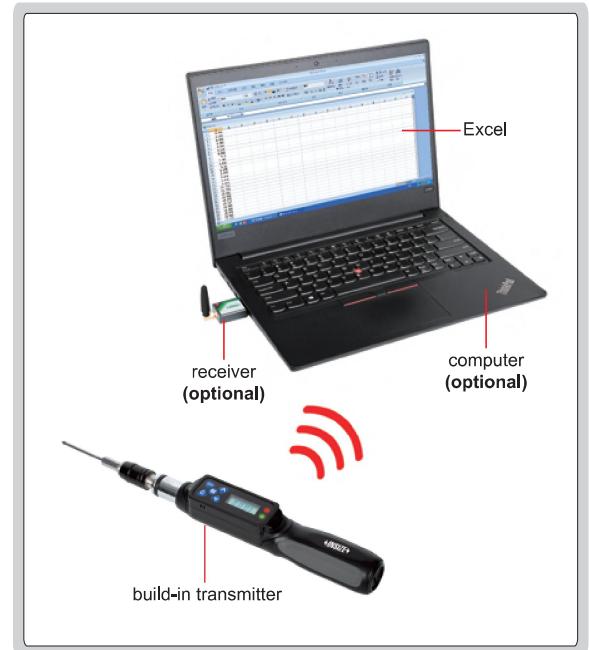

application

**SPECIFICATION**

| Code                   | IST-4SD50                     | IST-4SD200 | IST-4SD400 | IST-4SD600  |
|------------------------|-------------------------------|------------|------------|-------------|
| Range                  | 10~50cN.m                     | 40~200cN.m | 80~400cN.m | 120~600cN.m |
| Accuracy               | clockwise: $\pm 2\%$          |            |            |             |
| Resolution             | counter-clock wise: $\pm 3\%$ |            |            |             |
| Size of hex socket (L) | 0.1cN.m                       |            |            |             |
| Power supply           | 1/4"                          |            |            |             |
| Length                 | 1xAAA battery                 |            |            |             |
| Net weight             | 203mm                         |            |            |             |
|                        | 190g                          |            |            |             |

**STANDARD DELIVERY**

|                          |      |
|--------------------------|------|
| Torque screwdriver       | 1 pc |
| Phillips screwdriver bit | 1 pc |
| Hex screwdriver bit      | 1 pc |

**OPTIONAL ACCESSORY**

|                   |              |
|-------------------|--------------|
| Calibration cable | IST-SD-CABLE |
|-------------------|--------------|