

## DIGITAL TAPER SLOT GAUGES






DIRECT READING

DATA  
OUTPUT



1160-10

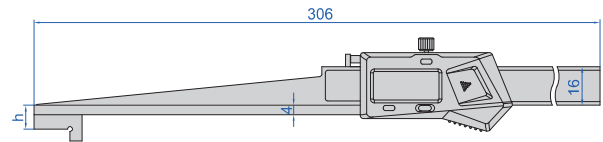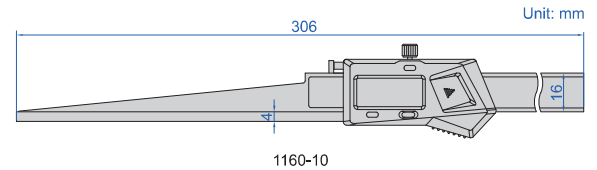

- Non waterproof
- Measuring opening, slot width
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel

Code	Range	Accuracy	h (initial value)	Measurement result	Wireless transmitter (optional) *
1160-10	0.2-10mm/0.01-0.39"	±0.03mm	—	direct reading	7315-1148 (receiver is needed)
1160-20	10-20mm/0.39-0.79"	±0.05mm	10mm	reading+h (initial value)	7315-1160A (receiver is needed)
1160-30	20-30mm/0.79-1.18"	±0.05mm	20mm	reading+h (initial value)	7315-1160B (receiver is needed)
1160-40	30-40mm/1.18-1.58"	±0.05mm	30mm	reading+h (initial value)	7315-1160C (receiver is needed)

\* Output measurement results directly. For example: code 1160-20, with a reading of 5.00, measurement result is 5+10 (initial value)=15, the data transmission value is 15.