


IP65
WATERPROOF

DATA
OUTPUT

DIGITAL TUBULAR INSIDE MICROMETERS

- Micrometer head: 150-175mm
- Resolution: 0.001mm/0.00005"
- Accuracy: $(3+n+L/50)\mu\text{m}$
n=number of rods
L=maximum measuring length (mm)
- Carbide measuring faces
- Diameter of extension rods is 22mm
- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, data transmit
- Data output
- Automatic power off
- Supplied with setting standards
- Power:
with data interface: CR2032
built-in wireless: rechargeable lithium battery

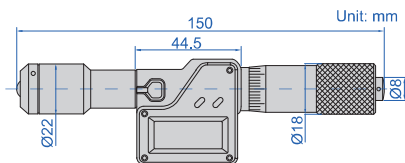

With data interface (optional wireless transmitter code 7315-31, receiver is needed)

Code	Range	Travel of micrometer head	Extension rods
3521-175	150-175mm	25mm	—
3521-1000	150-1000mm	25mm	25mm, 50mm (2 pcs), 100mm, 200mm, 400mm
3521-1500	150-1500mm	25mm	25mm, 50mm (2 pcs), 100mm (2 pcs), 200mm, 400mm (2 pcs)
3521-2000	150-2000mm	25mm	25mm, 50mm (2 pcs), 100mm, 200mm (2 pcs), 400mm (3 pcs)


Built-in wireless (receiver code 7315-2/3/6/7/8/9 is needed)

Code
3521-□□□□WL

Code examples:

Original code	Wireless code
3521-175	3521-175WL
3521-1000	3521-1000WL

Groove point (optional) *

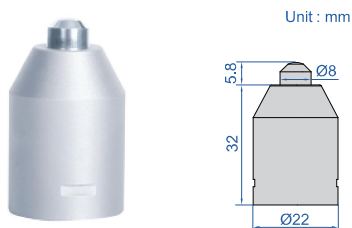

3521-T25

Code

3521-T25



*The range is increased by 25mm after groove point is installed (for example: code **3521-175**, the range is 175-200mm)

