


MINI DIGITAL MULTIMETER (BASIC TYPE)

CODE 9242-ML100A

- Portable size with protective case
- 1999 counts digital display
- Data hold
- Display with backlight
- Low battery indication
- Auto power-off
- Safety rating: CAT II 600V

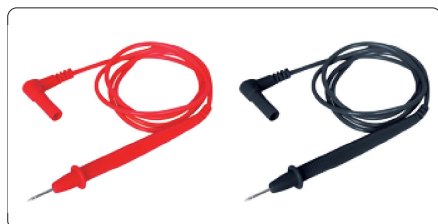

test leads (included)



STANDARD DELIVERY

Main unit	1pc
Battery (AAA)	2pcs
Test lead	2pcs

SPECIFICATION

Function	Range	Resolution	Accuracy
DC Voltage	200.0mV	0.1mV	$\pm(0.7\%+3d)$
	2000mV	1mV	$\pm(0.5\%+2d)$
	20.00V/200.0V/600V	0.01V/0.1V/1V	$\pm(0.7\%+3d)$
AC Voltage (40~400Hz)	200.0V/600V	0.1V/1V	$\pm(1.2\%+3d)$
DC Current	200.0 μ A/200.0mA	0.1 μ A/0.1mA	$\pm(1.0\%+2d)$
	10.00A	0.01A	$\pm(1.2\%+5d)$
Resistance	200.0 Ω	0.1 Ω	$\pm(1.0\%+2d)$
	2000 Ω /20.00k Ω /200.0k Ω	1 Ω /0.01k Ω /0.1k Ω	$\pm(0.8\%+2d)$
	20.00M Ω	0.01M Ω	$\pm(1.2\%+3d)$
Battery test	1.5V/9V/12V battery check		
Diode test	open circuit voltage: 2.1V DC		
Continuity test	<50 Ω		
Power supply	2 $\times$ 1.5V AAA batteries		
Dimension (L $\times$ W $\times$ H)	134 $\times$ 77 $\times$ 47mm		
Weight	206g		