


## MAGNETIC ROCKWELL HARDNESS TESTER CODE HDT-MR112



flat anvil



back


- According to ISO 6508

### SPECIFICATION

<b>Hardness scale</b>	HRA, HRB, HRC, HRD, HRF, HRG
<b>Preliminary test force</b>	98N (10kgf)
<b>Test force</b>	588N (60kgf), 980N (100kgf), 1471N (150kgf)
<b>Load control</b>	manual
<b>Resolution</b>	1HR
<b>Min. flat workpiece size</b>	length>210mm, width>70mm, thickness>15mm
<b>Dimension (L×W×H)</b>	232×131×171mm
<b>Net weight (with anvil)</b>	13kg

### OPTIONAL ACCESSORY

<b>Hardness test block</b>	
<b>Diamond indenter</b>	HDT-MR112-INDENTER1
<b>Ø1.5875mm steel ball indenter</b>	HDT-MR112-INDENTER2

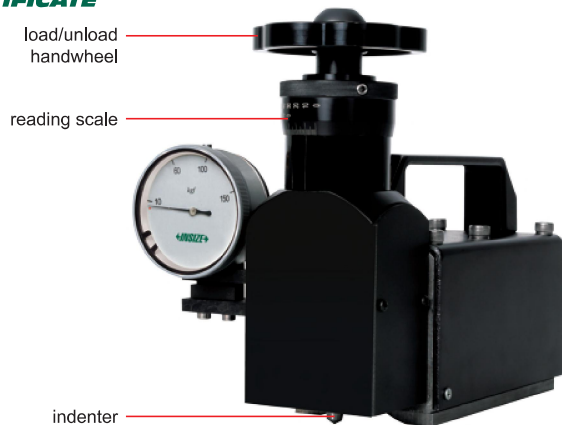

### STANDARD DELIVERY

<b>Main unit</b>	1 pc
<b>Diamond indenter</b>	1 pc
<b>Ø1.5875mm steel ball indenter</b>	1 pc
<b>Flat anvil</b>	1 pc
<b>Hardness test block HRA80~84</b>	1 pc
<b>Hardness test block HRB88~100</b>	1 pc
<b>Hardness test block HRC20~30</b>	1 pc
<b>Hardness test block HRC35~55</b>	1 pc
<b>Hardness test block HRC60~70</b>	1 pc